


NOMINAL DIMENSION FIGURE
SHOWN. CHECK BEFORE DRILLING
WITH NOSE CONE AND RELEASE
TEMPORARILY FITTED
TO FUSELAGE

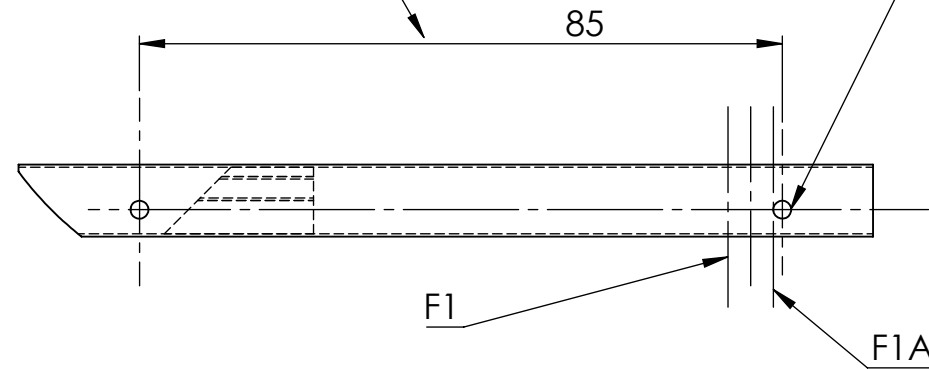

DRILL ADDITIONAL
 $\phi 1/8$ " HOLE IN FRONT OF F1A
AND FIT $\phi 1/8$ " BAR
MINIMUM 25 LONG
EPOXY BAR IN PLACE AFTER NOSE
CONE AND RELEASE ARE IN PLACE

SCALE 1:3 ASK13
MODIFICATION TO TOW RELEASE
ASSEMBLY FOR THOSE CONCERNED
ABOUT TOWING FORCES ON THE NOSE CONE

JILLES SMITS
23/01/21