


To receiver, feeding both ends of the power rail.  
 If that is not required, common the feeds after the switches.

*Fig. 1 Arrangement for charging batteries out of the model (diodes can be the other side of the switches if required)*

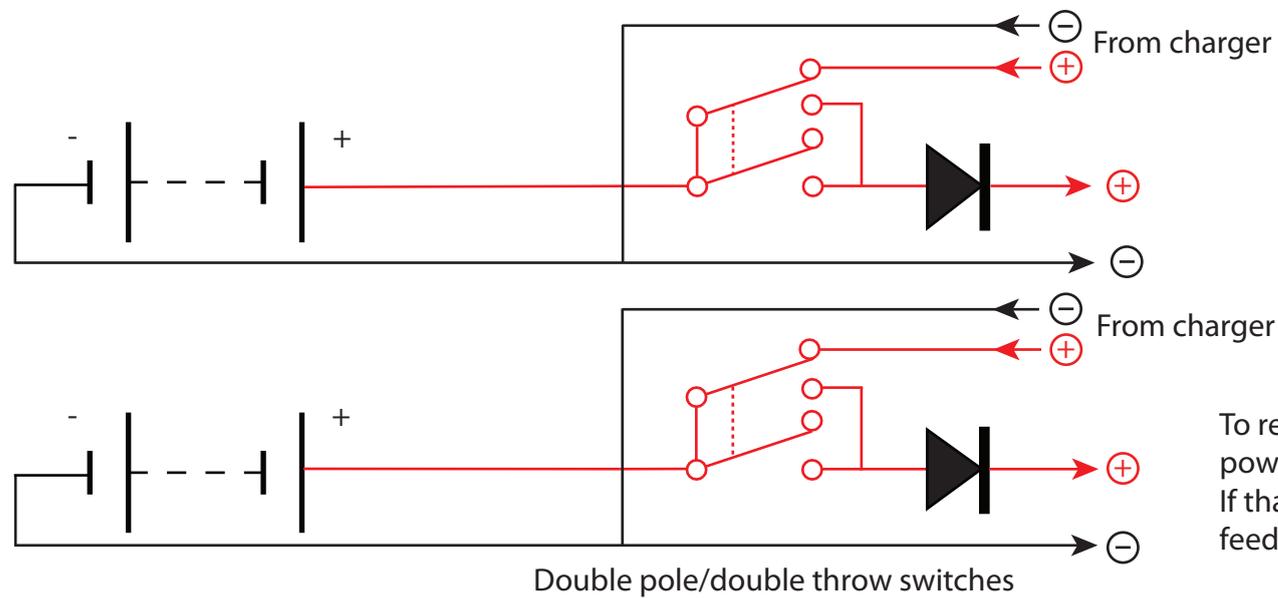

To receiver, feeding both ends of the power rail.  
 If that is not required, common the feeds after the switches and the diodes.

*Fig. 2 Arrangement for charging in situ through the switches*