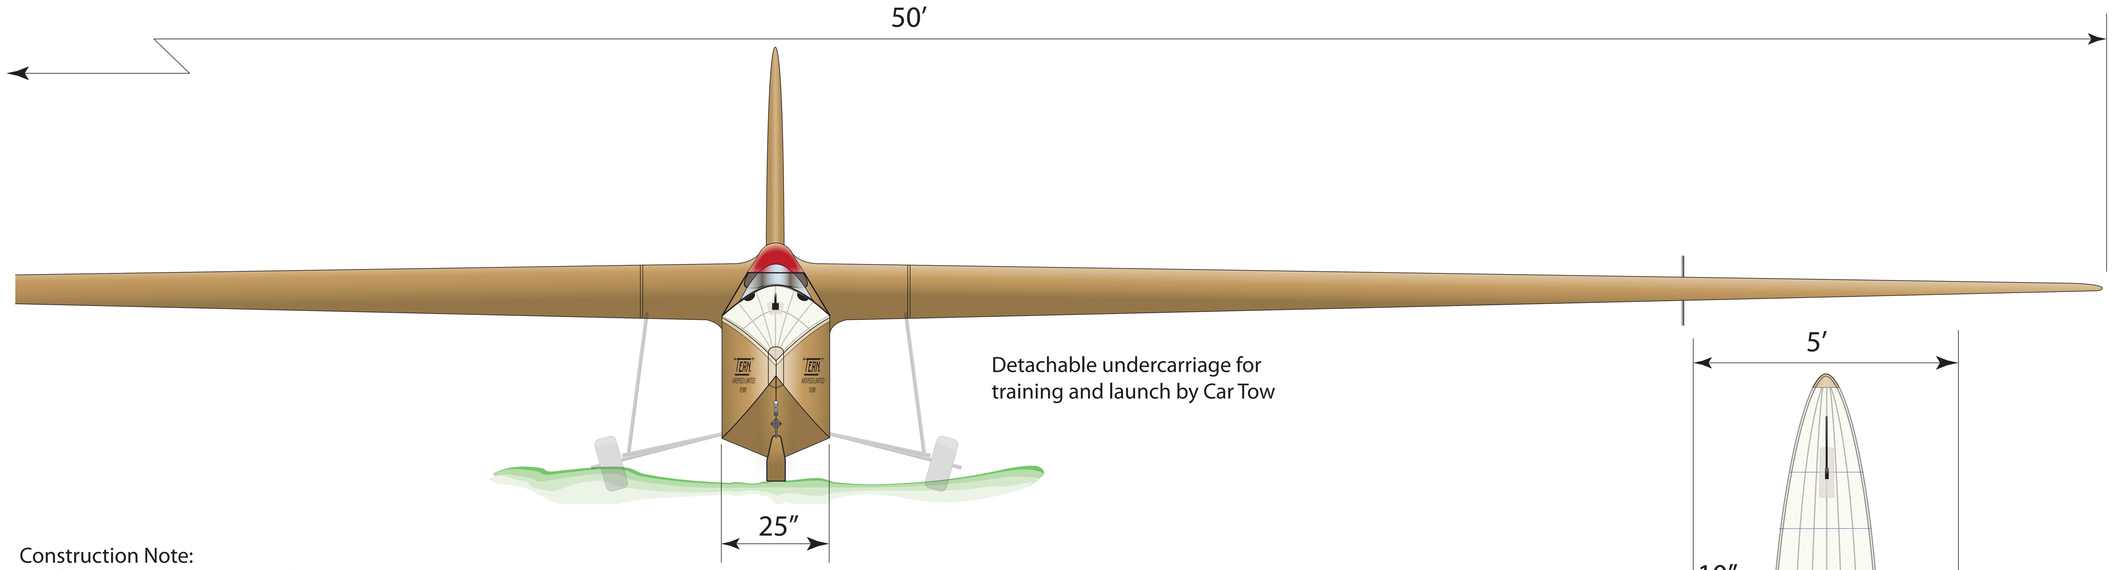

Detachable undercarriage for training and launch by Car Tow

Construction Note:
A side stringer is positioned above the fuselage side indicated by a dotted line. This creates a bend along the bottom of the cockpit cover. Below is a typical non scale view of the rear top fuselage construction

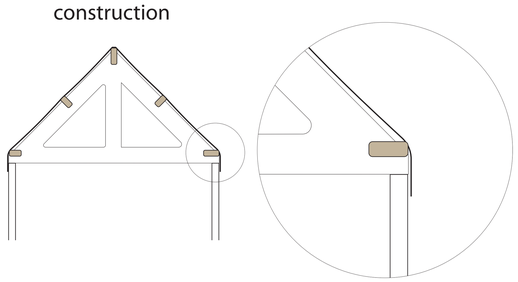

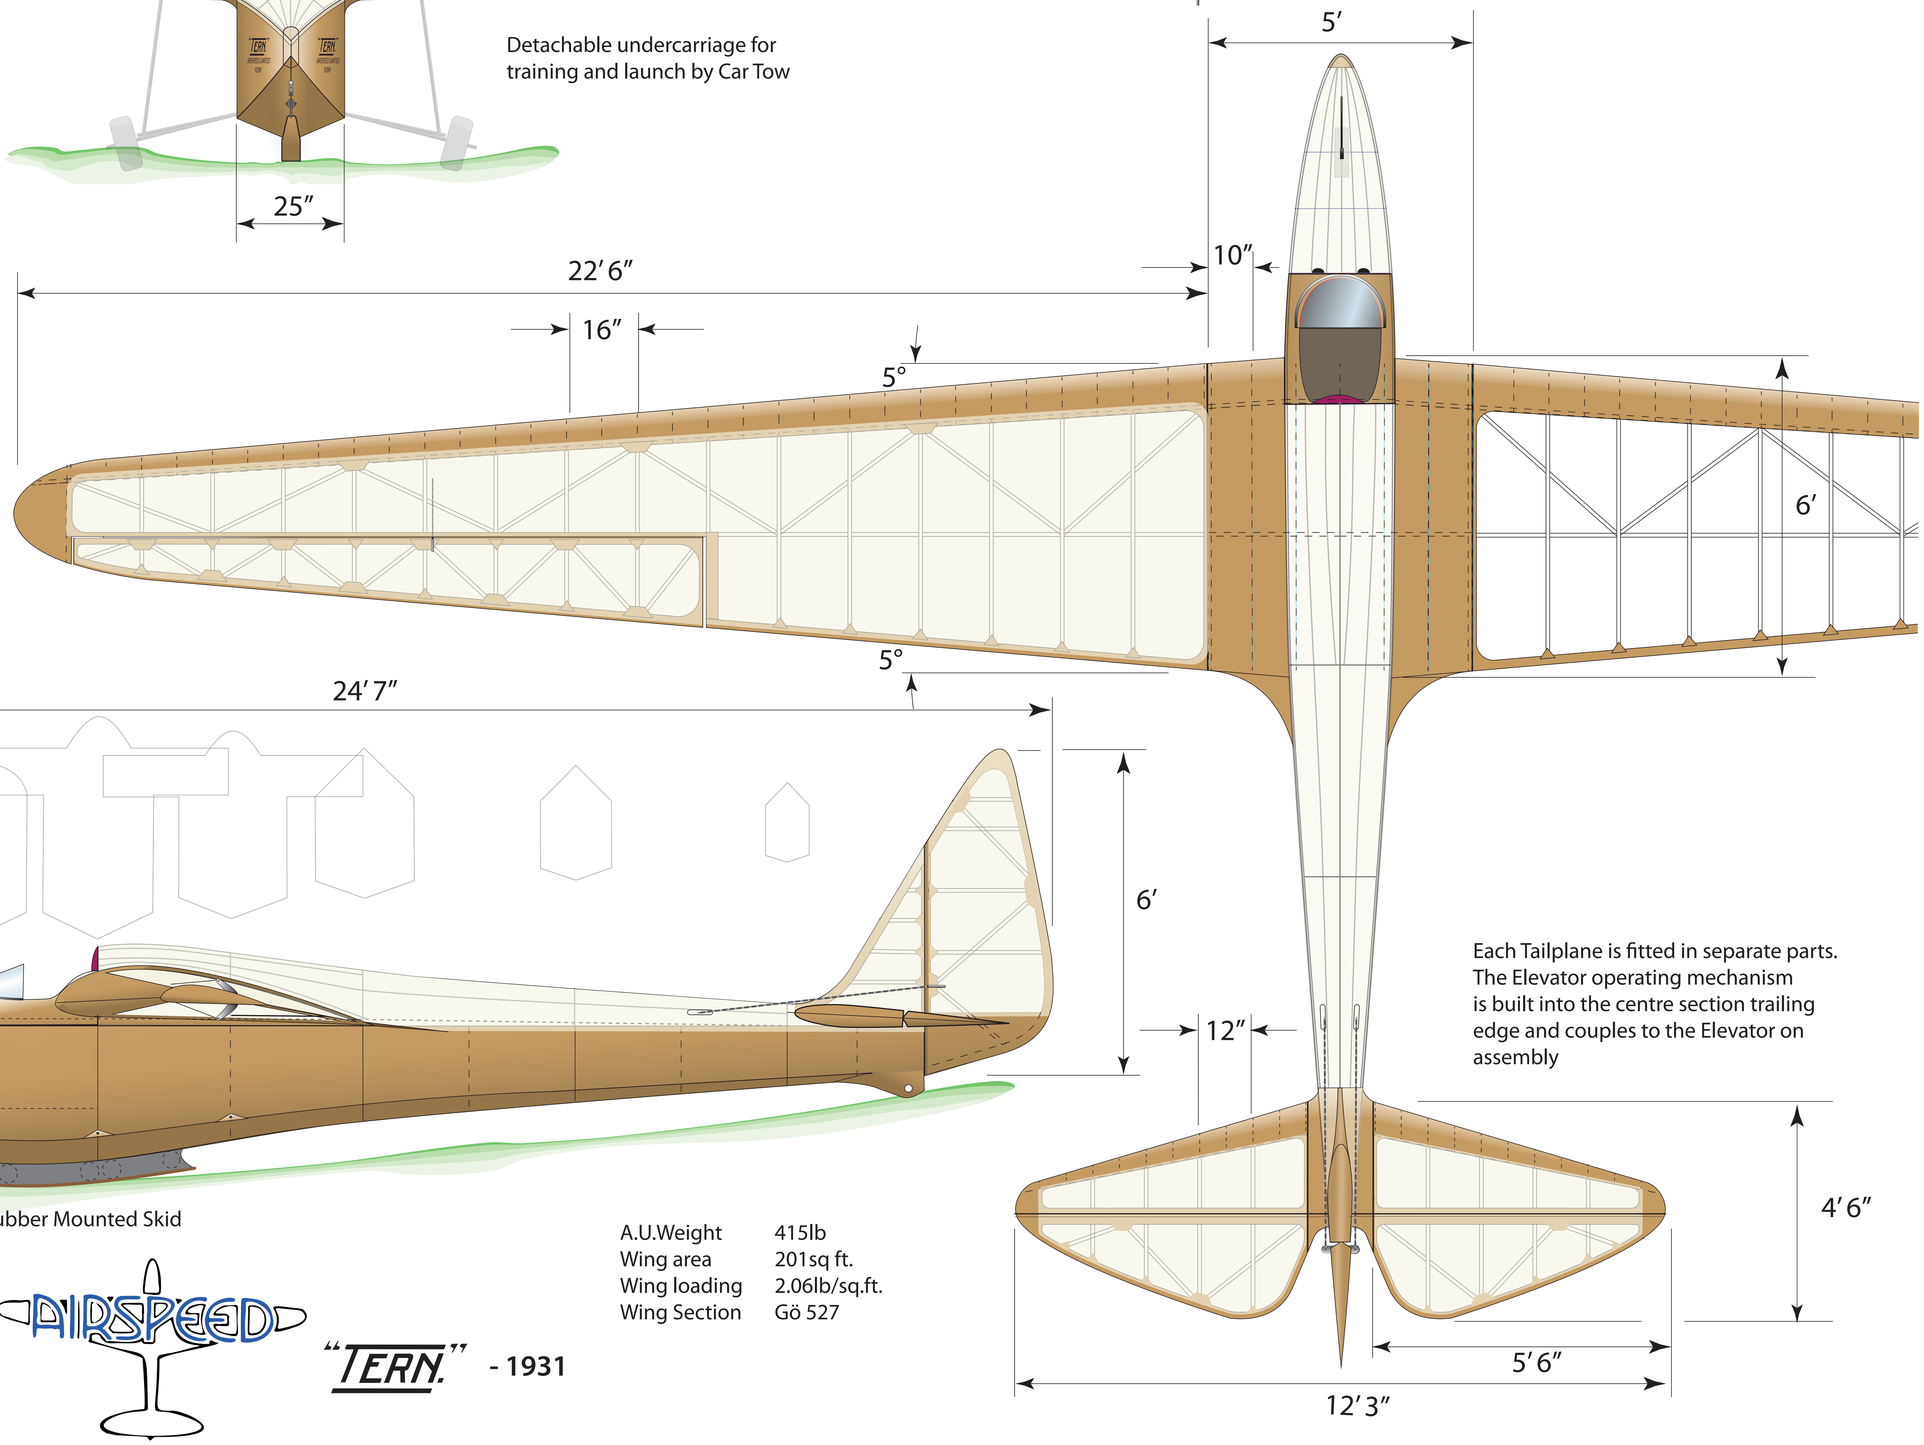

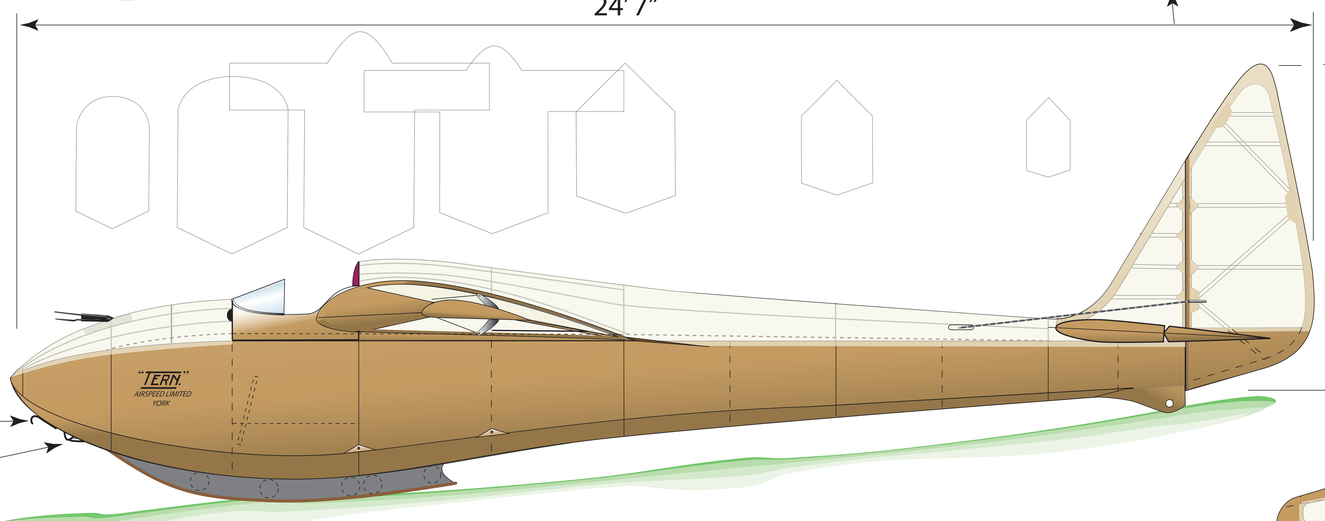

Each Tailplane is fitted in separate parts. The Elevator operating mechanism is built into the centre section trailing edge and couples to the Elevator on assembly

A.U.Weight	415lb
Wing area	201sq ft.
Wing loading	2.06lb/sq.ft.
Wing Section	Gö 527

12″ 0 2 4 6 feet

Drawn by: Vincent Cockett - 2017

AIRSPEED

"TERN" - 1931